

# JAMF Gravel Stop System



## Overview

The JAMF Gravel Stop System is a two-part assembly that includes a continuous cleat and a decorative fascia cover for single-ply commercial roof systems. Our Econo Gravel Stop is available in pre-painted Kynar500® .032, .040 and .050 formed aluminum as well as 24 and 22 gauge Galvalume Steel. This product features a 24 and 22 gauge pre-punched cleats with fasteners spaced at 12" on center. All products come in standard 10' cleat and fascia cover lengths. Concealed splice plates and fasteners are included with the purchase of this product.

## Features and Benefits

- Secures roof Membrane to Parapet Wall
- Allows for the use of high-torque screws without penetrating the top surface of the Membrane
- Pre-Punched Continuous Cleat
- Economical Design
- ANSI-SPRI ES-1 Certified
- 110 MPH 20-Year Wind Warranty
- Gold Standard Paint 35-Year Warranty
- Corporate and Custom Colors are available

## Installation

For complete installation instructions, please refer to JAMF Architectural specifications and details.

REVIEW CURRENT JAMF ARCHITECTURAL SPECIFICATION AND DETAILS FOR SPECIFIC INSTALLATION REQUIREMENTS.

## Quality Assurance

JAMF Gravel Stop System is tested per ANSI/SPRI Test Method RE-2 for fascia. The Gravel Stop systems shall be certified by JAMF to design pressures as indicated in current edition of SPRI's Wind Resistance Standard for Edge Systems used with Low Slope Roofing System. This products meets International Building Code minimum requirement.

## Technical Services

Engineering and shop drawings, as well as long-form specifications and CAD details, are available from JAMF. Product samples, detail sheets, color chips and color charts are also available for submittal packages. For personal assistance with questions or for full submittals, contact JAMF or your local independent sales representative.

Specifications	
Material	Sustained Pressures
24 gauge	-310 psf (*)
0.032 AL	-260 psf (*)


\* Design Engineer must apply the Factor of Safety

\*\*ADDITIONAL GAUGES - .040, .050 and .063 aluminum and 22 gauge Galvalume are available upon request

**Gravel Stop & Cleat**

ANSI/SPRI

ES-1 Certified:

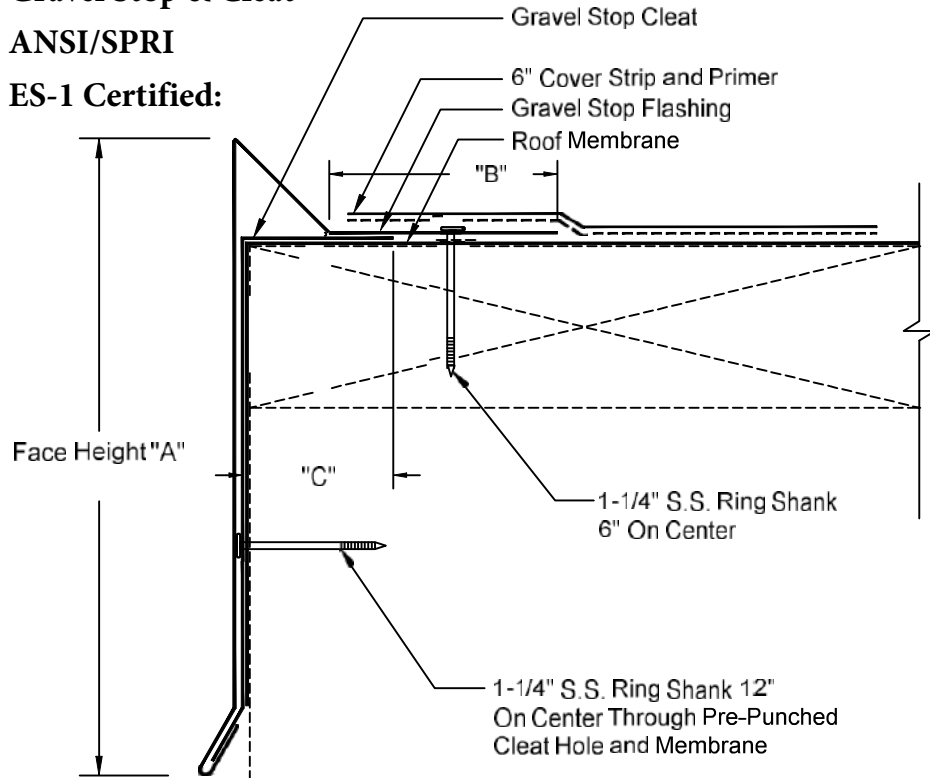

"A" =   
 Face Height  
 Standard Flange 3"

"B" =   
 Gravel Stop Flange  
 Standard Flange 1.5"

"C" =   
 Cleat Flange

- Continuous Cleat and Fasteners Provided
- Concealed Splice Plates Provided
- Continuous Cleat: 22 GA 20 GA

**PRINT APPROVAL:**

Architect and/or Contractor shall verify all dimensions, sizes and quantities. All Products to be installed in strict accordance with Jackson Architectural Metals printed instructions.

Approved by:

Date:

Project Name/PO#:

Roofing Contractor:

Representative:

**QUANTITIES:**

Optional Welded  
 (Surcharge Applies)

Lineal Feet \*:

Outside Miters\*\*:

Inside Miters\*\*:

Right End Caps\*\*:

Left End Caps\*\*:

Splice Plate Tape Sealant:

\*Optional lengths available up to 20'-0"

\*\* Standard riveted

**MATERIAL:**

24 GA .040" AL .050" AL

OTHER

Finish:

Color:

Carlisle

Firestone

Other: