


**Gravel Stop & Cleat**

ANSI/SPRI

ES-1 Certified:

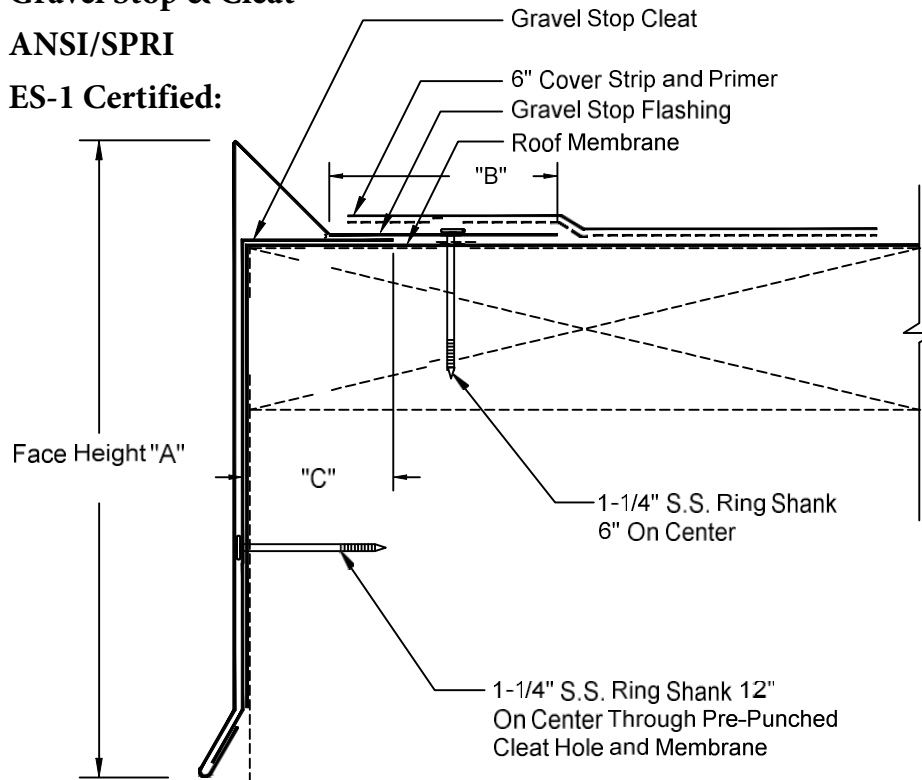

"A" =   
Face Height

"B" =   
Gravel Stop Flange

"C" =   
Cleat Flange

- Continuous Cleat and Fasteners Provided
- Concealed Splice Plates Provided
- Continuous Cleat: 22 GA 20 GA

**PRINT APPROVAL:**

Architect and/or Contractor shall verify all dimensions, sizes and quantities. All Products to be installed in strict accordance with Jackson Architectural Metals printed instructions.

Approved by:

Date:

Project Name/PO#:

Roofing Contractor:

Representative:

**QUANTITIES:**

Optional Welded (Surcharge Applies)

Lineal Feet \*:

Outside Miters\*\*:

Inside Miters\*\*:

Right End Caps\*\*:

Left End Caps\*\*:

Splice Plate Tape Sealant:

\*Optional lengths available up to 20'-0"

\*\* Standard riveted

**MATERIAL:**

24 GA .040" AL .050" AL

OTHER

Finish:

Color:

Carlisle

Firestone

Other: